



1) Parts of the connector




2) Outer sheath strip max L(mm)
Insulation strip length X(mm)




3) Tightening torque 0,5Nm
Cross-Slotted head screwdriver
DIN ISO 8764

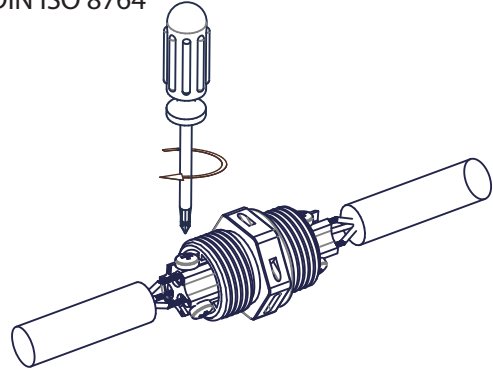

4) Push and turn connector parts

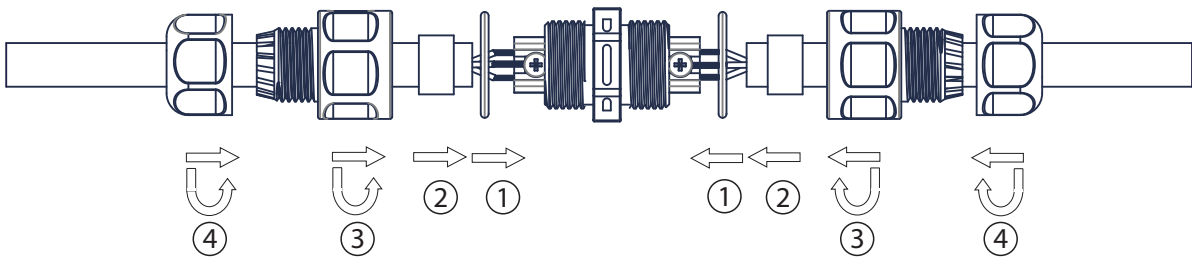

5) Lock the parts

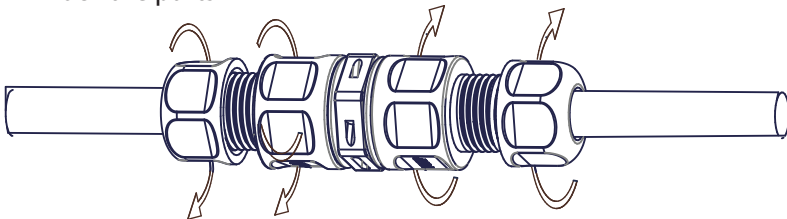

← : Push
↺ : Push & Turn

6) Tightening torque 2-2,5Nm

