




ELERIX SOLAR PANEL

TOPCon N type Mono-crystalline
600 Watt Full Black



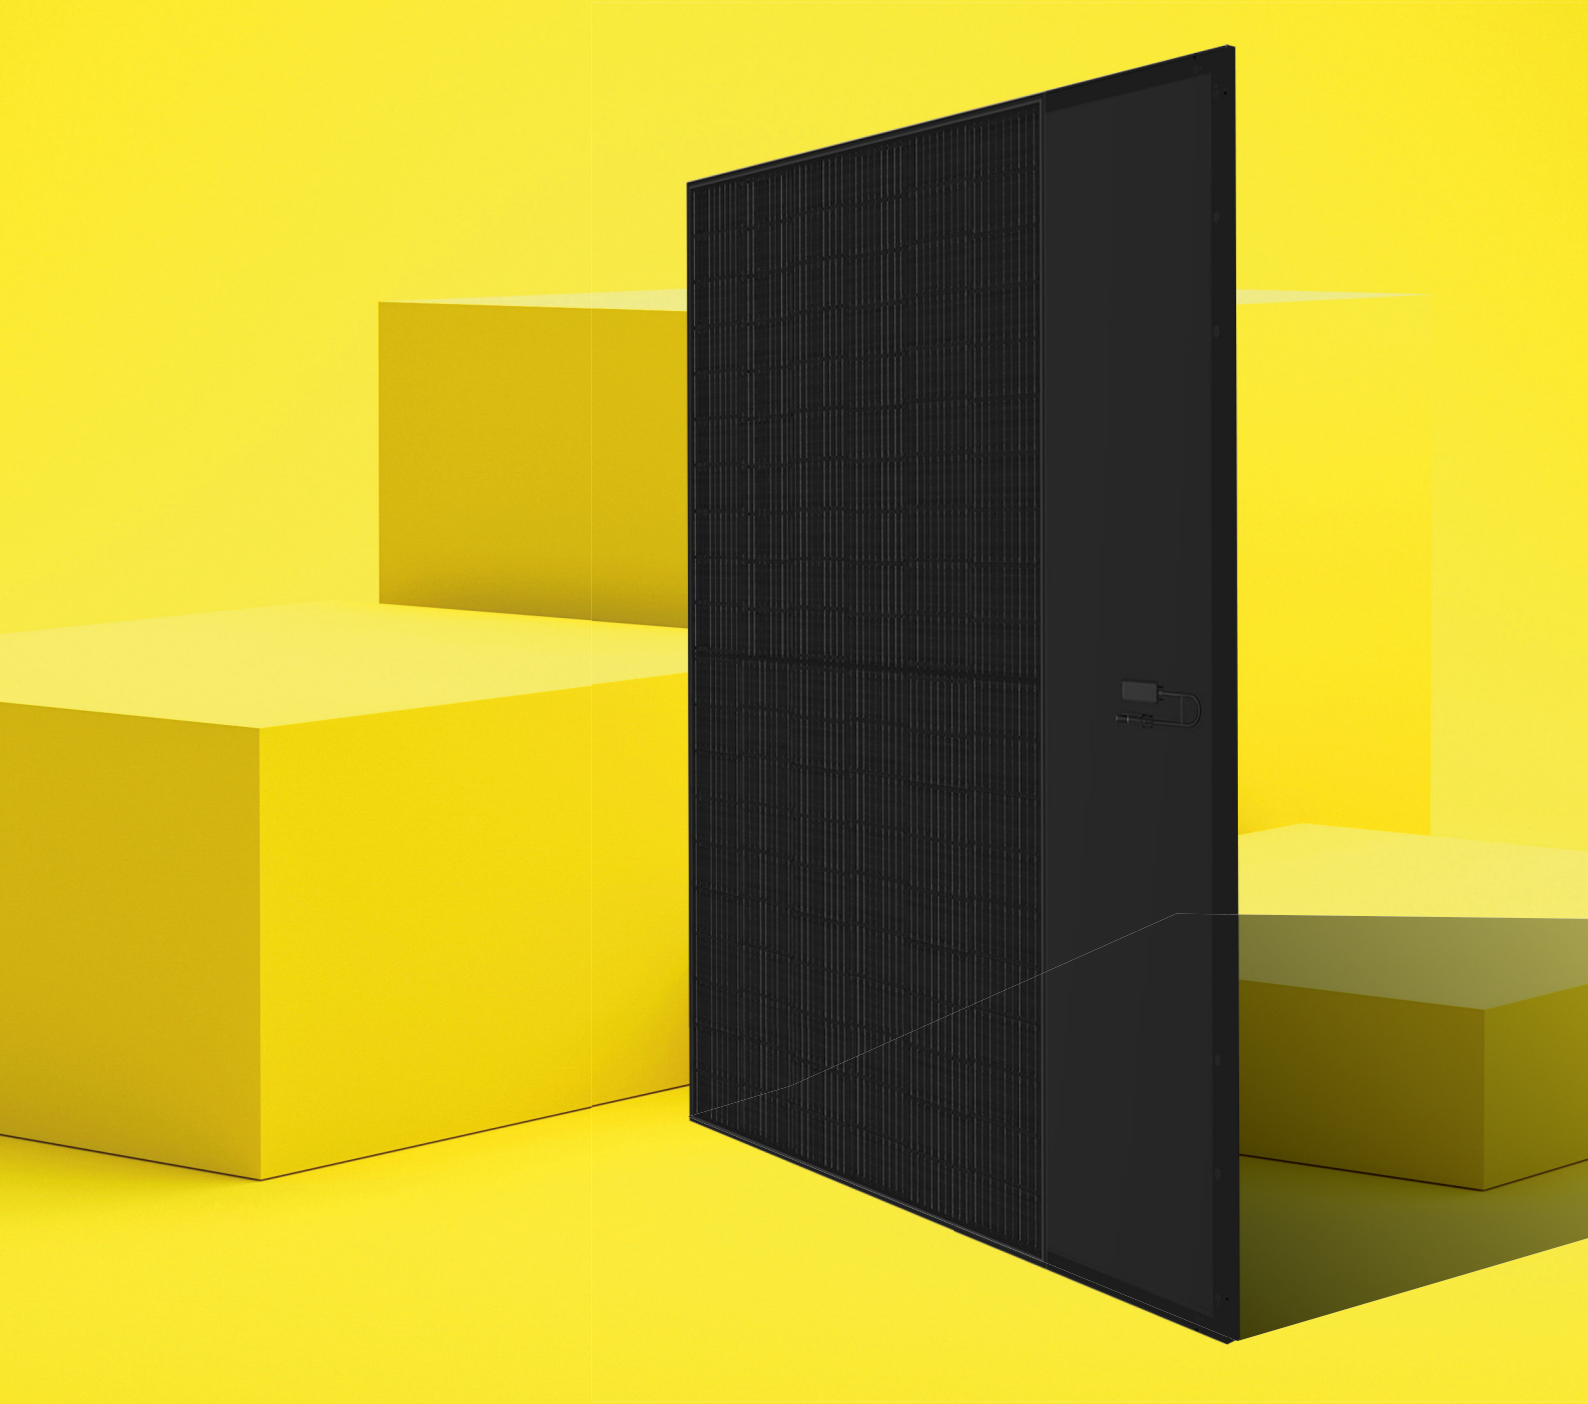




ELERIX SOLAR PANEL





TOPCon N type Mono-crystalline
600 Watt Full Black


ELERIX TOPCon N type Mono-crystalline 580-600 Watt Full Black

Key Features

-  Strong Mechanical Strength
-  PID resistance
-  Multiple busbar and Half cell technique
-  Lower attenuation
-  Harsh environmental adaptation

Warranty

-  30 years power linear warranty
-  30 years material and workmanship warranty

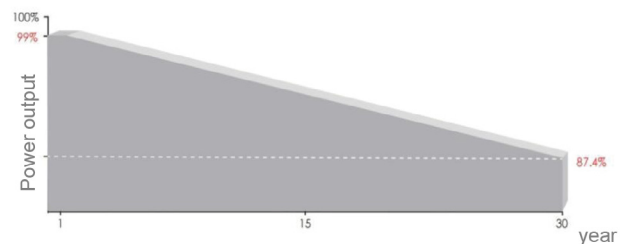

Certification




Long and reliable quality assurance

IEC61215(2016), IEC61730(2016)
ISO9001:2015: Quality management system
ISO14001:2015: Environmental management system
ISO45001:2018: Occupational health and safety management system

ELERIX SOLAR PANEL






TOPCon N type Mono-crystalline
600 Watt Full Black

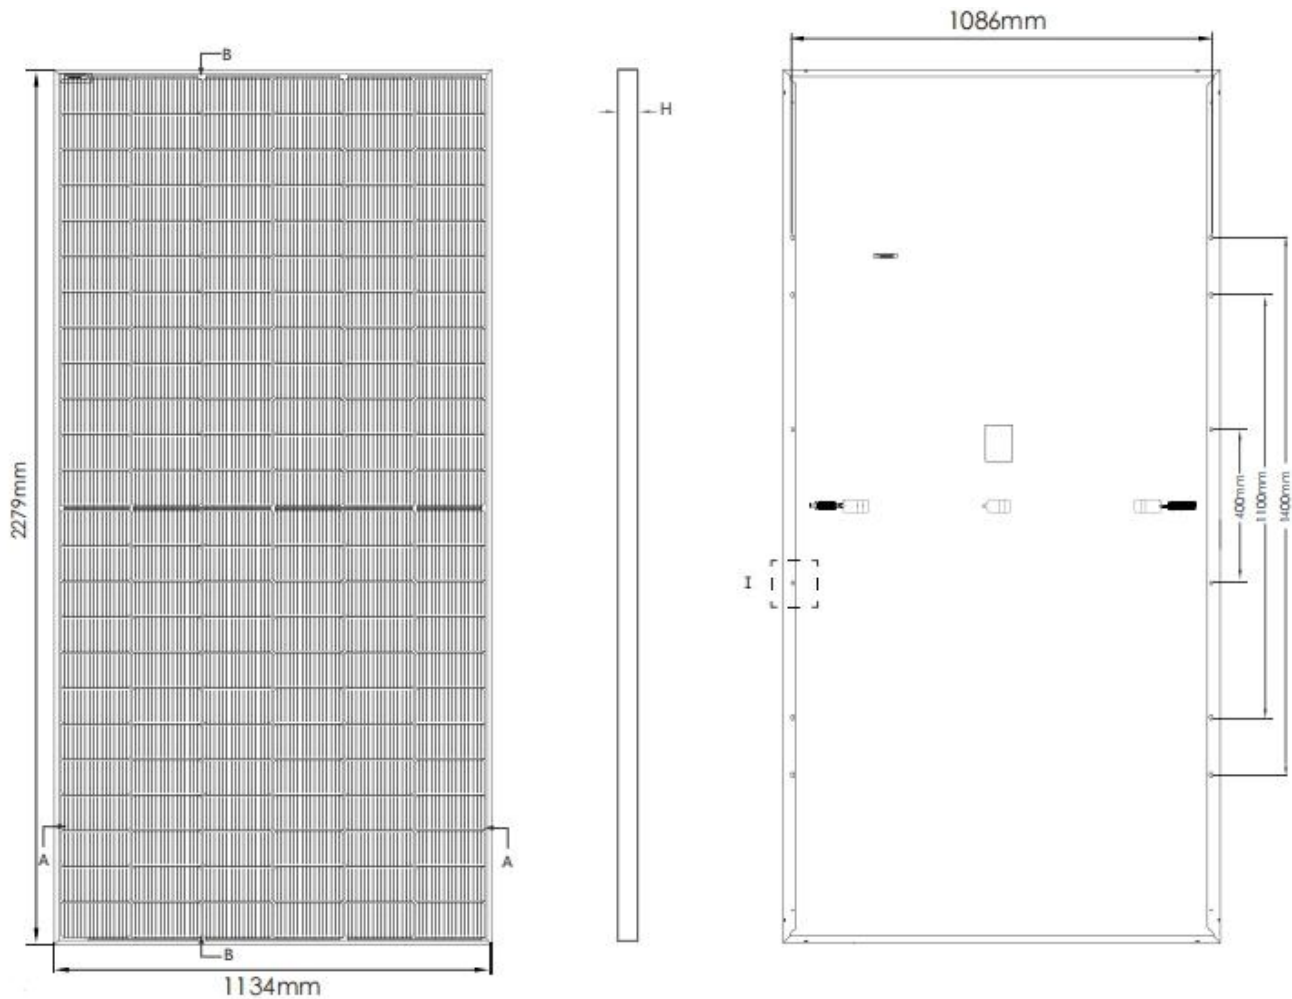

ELERIX SOLAR PANEL



TOPCon N type Mono-crystalline
600 Watt Full Black

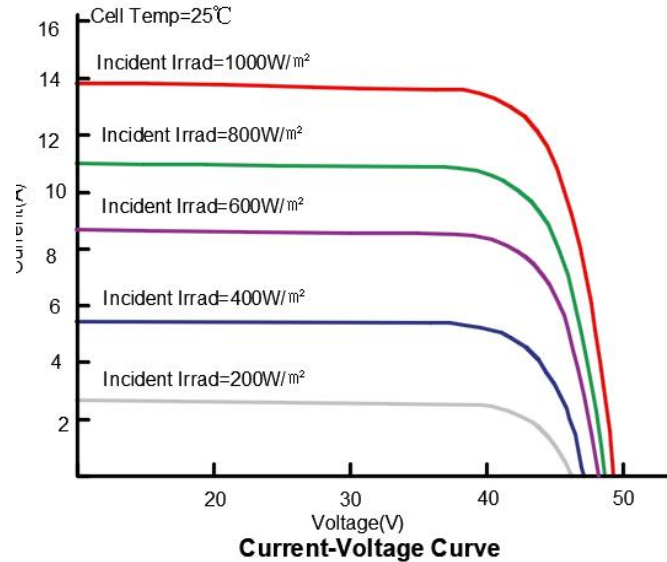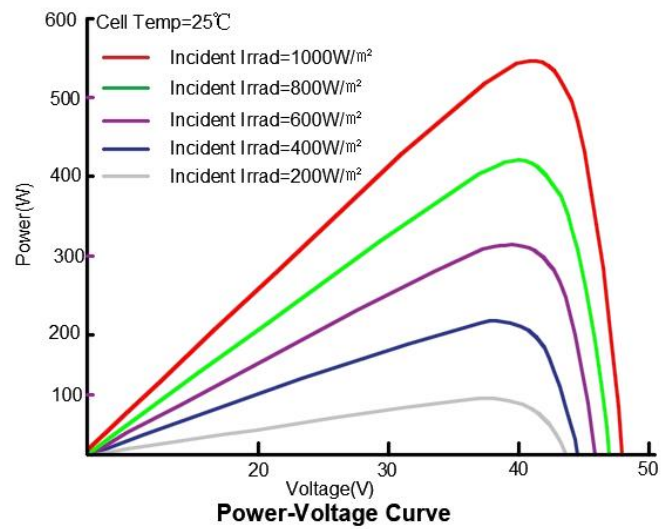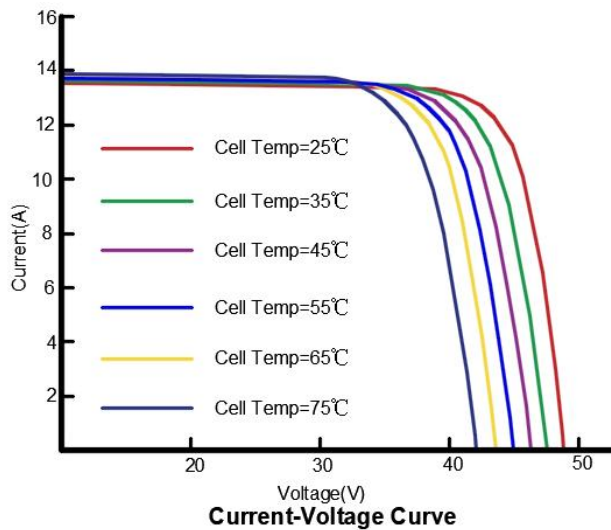

ELERIX SOLAR PANEL



TOPCon N type Mono-crystalline
600 Watt Full Black

Electrical Specification	ESM-600T
Maximum Power (Pmax)	600W
Open Circuit Voltage (Voc)	51,46V
Short Circuit Current (Isc)	14.61A
Maximum Power Voltage (Vmp)	42.54V
Maximum Power Current (Imp)	14.10A
Module Efficiency - η_m (%)	23.21

STC: Irradiance 1000W/m², Cell temperature 25°C, Atmospheric quality = 1.5

NOCT: Irradiance 800W/m², Ambient temperature 25°C, Atmospheric quality = 1.5, Wind speed 1m/s

Mechanical Specification	
Cell type	N type mono crystalline 182.2x183.75mm
Half-cell quantity	144pcs (6 × 24)
Dimension	2279 × 1134 × 30
Weight	28kg±3%
Glass	3.2mm, tempered and AR coated
Frame	Black Aluminum Alloy
Junction Box	IP68
Cable	1200mm (can be customized)

ELERIX SOLAR PANEL

TOPCon N type Mono-crystalline
600 Watt Full Black



Packaging Configuration

1 pallet	36 pcs
1 pallet size	2314 × 1130 × 1245mm
1 container 40GP	20 pallets / 720 pcs

Temperature Characteristic

Operational Temperature	-40°C~+85°C
Temperature Coefficient of Pmax	-0.310%/°C
Temperature Coefficient of Voc	-0.260%/°C
Temperature Coefficient of Isc	+0.046%/°C
Nominal Operating Cell Temperature	45±2°C

Maximum Ratings

Maximum System Voltage	1500VDC
Maximum Series Fuse Rating	25A
Power Tolerance	0~+5%
Safety Class	Class II
Max Load (Front/back)	5400Mpa/2400Mpa

Manufacturer:
EINNOVA SOLARLINE ENERGY CORP. LIMITED
210000 Nanjing
PEOPLE'S REPUBLIC OF CHINA

Importer:
100MEGA Distribution s.r.o.
Železná 7, 619 00 Brno
CZECH REPUBLIC