
Key **Features**

- Ultra Fine Touch Technology offering up to 40-point touch for a pen-on-paper writing experience
- myViewBoard Whiteboard software with engaging classroom tools
- Screen share via USB-C or wirelessly via myViewBoard Display and ViewBoard Cast with Airplay and Chromecast
- Intuitive remote device control and multimedia broadcast
 with myViewBoard Manager
- Android 11 OS powered by an octacore CPU for optimized efficiency and security



Product **Description**

Designed with modern educators in mind, the ViewBoard® 50-5 Series offers an intuitive and interactive interface for a multi-user writing experience. With a single-cable USB-C for instant, worry-free connectivity, teachers can seamlessly plug-in and control their devices while continuing the lesson. Both students and educators enjoy smooth writing with Ultra Fine Touch Technology offering 40-point touch, and the dual-pen that comes in a range of colors and sizes. Rest assured you and your students' eyes are cared for and protected as the ViewBoard® 50-5 Series comes with Flicker-Free technology and an integrated TÜV certified blue light filter for all brightness levels. Fully integrated with the myViewBoard suite, the ViewBoard® 50-5 Series brings together hardware and software for a complete classroom solution. Compatible with a full line of accessories, the ViewBoard® 50-5 Series enables you to effectively teach with a variety of engaging tools.

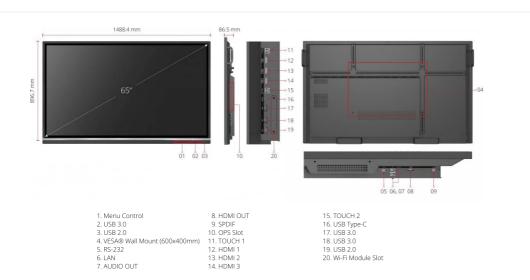

Visit Us www.viewsonic.com



| DISPLAY |
|---------|
|---------|

| D 101 E/ 11 | |
|--------------------|--|
| Panel Size: | 65" |
| Panel Type: | TFT LCD Module with DLED Backlight.IPS |
| Display Area (mm): | 1428.48(H) × 803.52(V) |
| Aspect Ratio: | 16:9 |
| Resolution: | UHD 3840x2160 |
| Colors: | 1.07B colors (10bit) |
| Brightness: | 400 nits (typ.), 450 nits (max.) |
| Contrast Ratio: | 1200:1 (typ.) 5000:1 (DCR) |
| Response Time: | 8ms |
| Viewing Angles: | H = 178, V = 178 typ. |
| Backlight Life: | 50,000 hours (Min) |
| Surface Treatment: | Hardness: 7H, Anti-glare coating |
| Bezel: | Slim |
| Orientation: | Landscape |

PLATFORM

| Processor: | ARM Cortex-A73*4 + Cortex-A53*4 |
|------------|---------------------------------|
| RAM: | 4GB |
| Storage: | 32GB |

TOUCH

| Type/ Tech: | Ultra Fine Touch Techology (IR Recognition) |
|-------------------|---|
| Touch Resolution: | 32768 ×32768 |
| Touch Point: | Windows: 40 points of touch, Android : 20 points of touch |

INPUT

| HDMI: | 2.0 x 3 (3840x2160 @60Hz, HDCP2.2, HDMI1 with CEC/ARC) |
|--------|---|
| RS232: | x1 |
| OPS: | x1 |
| WiFi: | x 1 module slot |

OUTPUT

| LAN | |
|--------|-------------------|
| SPDIF: | x1 (optical) |
| Audio: | x1 (Earphone out) |
| HDMI: | x1 (4K@60Hz) |

RJ45 USB

| Type A: | 2.0 x 2 3.0 x 4 |
|---------|---|
| Type B: | x2, for touch |
| Type C: | x1 (DP 1.2, USB2.0, PD65W, Ethernet 100M) |

SPEAKERS

15W x 2 + 16W x 1 subwoofers

TOP CAMERA PLATE

Yes

EMBEDDED OS

Android 11

BUNDLE SOFTWARE

| Basic Annotation Software: | myViewBoard |
|----------------------------|---|
| Pro Annotation Software: | myViewBoard for Windows (Embedded in Windows Slot-in PC) |
| Wireless Presentation: | vCast/myViewBoard Display App |

| SPECIAL FEATURES | | | |
|--|-----------------------------------|--|--|
| All-in-one USB port: | "SmartPort™ USB" to all channels. | | |
| Simple LAN sharing between IFP and slot-in device: | Yes | | |
| Light Sensor: | Yes | | |
| POWER | | | |
| Voltage: | 100-240VAC +/- 10% Wide Range | | |

95W(typ.), 0.5W (off)

Consumption: **ERGONOMICS**

Wall Mount (VESA®): 600 mm x 400 mm

OPERATING CONDITIONS

| Temperature (° C): | 0°C to 40°C |
|--------------------|-----------------------------|
| Humidity: | 10% ~ 90% RH non-condensing |

DIMENSIONS (W X H X D)

| Physical (inch / mm): | 58.6 x 35.3 x 3.5 in / 1488 x 897 x 90 mm |
|------------------------|---|
| Packaging (inch / mm): | 65.7 x 39.8 x 8.8 in /1699x 1010x 233 mm |

WEIGHT

| Net (lb / kg): | 89.3lb/40.5kg |
|------------------|----------------|
| Gross (lb / kg): | 109.6lb/49.7kg |

REGULATIONS

cTUVus, FCC/ICES003, Energy Star 8.0, EMC/CE, CB/LVD, GOST-R/EAC, UkrSEPRO, EPEAT, Mexico NOM, Mexico Energy, UKCA, UK-EEL, BSMI, BIS, LBL(Low Blue Light Certification), Flicker Free, Green BOM, RoHS, ErP-Eco, REACH, SCIP, WEEE, TPCH, Packing waste, CA65, PAIA

PACKAGE CONTENTS

- "1. Power cord by ship area (UK/EU)
- 2. Remote control with AAA battery
- 3. Touch USB cable
- 4. Touch pen x 2 (VB-PEN-009)
- 5. Quick Start Guide + Compliance statement
- 6. RS232 adapter
- 7. Clamp x 5
- 8. Camera Plate
- 9. Screw x 8
- 10. HDMI cable 3m
- 11. USB-C cable 1.8m"

COMPATIBLE SLOT-IN PC

VPC12-WPO series VPC25-O-B series VPC27-O-B series